

Electric Alarm Siren S0

Comax
Signaltechnik

General information


Powerful, compact motor siren for universal use.

Option: With protection hood for outdoor application.



Technical data

Case	die cast aluminium
Protection hood	weather proof plastic
Current	AC/DC
Starting current	approx 4x current consumption
Output	0.037 kW
Operational class	short-time operation S2 15 min
Insulation class	B
Protection class	IP22 with protection hood IP44
Rotational speed	8000 RPM
Number of windows	6
Sound frequency	800 Hz
Weight of siren	approx. 1.6 kg

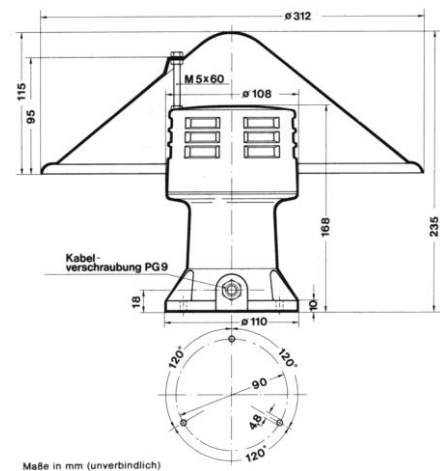

Order data

Item number	Rated voltage	Sound intensity level	Current consumption	Range of audibility with wind / against wind
S0.230.3	230 VAC/VDC	approx 112 dB(A), 1m	0.60 A	approx 0.3 km / approx 0.15 km

Option: protection hood

Other voltages upon request

Subject to change without prior notice



Comax
Signaltechnik

Comax Industrielle Signaltechnik AG, Römerstrasse 6/Postfach, CH-4512 Bellach/Schweiz
Tel +41-(0)32-617 31 41 Fax +41-(0)32-617 31 40 e-mail: mail@comax.ch internet: www.comax.ch

E_S0_REV1_18_11_2015