


RIDGE43

IP 43



Application: Thanks to its luminous characteristics and excellent efficiency, the lighting fixture RIDGE43 is suitable for mounting at high ceiling rooms.

Ballast: EP – electronic 220-240 V/50-60 Hz AC, 220-240 V DC

Light source: LED, 4000K, CRI +80, MacAdam3

Housing: White painted steel sheet RAL 9016

Optics: S – PMMA optics with wide radiant luminous characteristics
 H – PMMA optics with deep radiant luminous characteristics
 R – PMMA optics suitable for lighting of rack aisles

Fastening: Suspension by means of suspension mechanism


Connection: Screwless three-pole terminal block, max. diameter of wires 2.5 mm²

Standard equipment: GESIS connector for 6 - 10 mm diameter of cable

Calculated lifetime – LED modules:

L80B10 ta30 – 75 000h


L70B10 ta30 – 110 000h

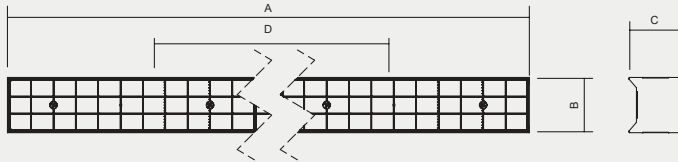


Order number	Name	Lighting fixture luminous flux (lm)	Power input (W)	Rated power output (lm/W)	Ta max (°C)	Dimensions of lighting fixture A x B x C (mm)	Mounting spacing D (mm)	Weight (kg)
4000K								
055752	RIDGE43-H-5500-4K	5345	37	144	35	861x65x60	700	3
055753	RIDGE43-H-7500-4K	7126	49	145	35	1147x65x60	986	3,3
055754	RIDGE43-H-9200-4K	8908	62	144	35	1433x65x60	1261	3,6
055755	RIDGE43-H-11100-4K	10690	74	144	35	1719x65x60	1541	4
055756	RIDGE43-S-5500-4K	5217	37	141	35	861x65x60	700	3
055757	RIDGE43-S-7500-4K	6956	49	142	35	1147x65x60	986	3,3
055758	RIDGE43-S-9270-4K	8695	62	140	35	1433x65x60	1261	3,6
055759	RIDGE43-S-11100-4K	10434	74	141	35	1719x65x60	1541	4
055760	RIDGE43-R-5500-4K	5111	37	138	35	861x65x60	700	3
055761	RIDGE43-R-7500-4K	6815	49	139	35	1147x65x60	986	3,3
055762	RIDGE43-R-9200-4K	8519	62	137	35	1433x65x60	1261	3,6
055763	RIDGE43-R-11000-4K	10222	74	138	35	1719x65x60	1541	4

Tolerance of luminous flux and power input of lighting fixture +/- 10%


RIDGE43-H-4K

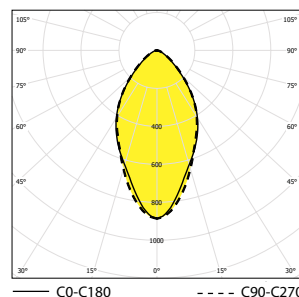

RIDGE43-R-4K

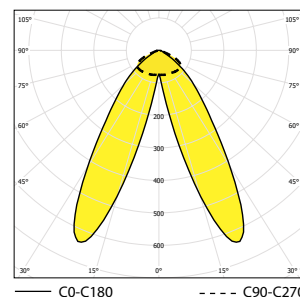

RIDGE43-S-4K

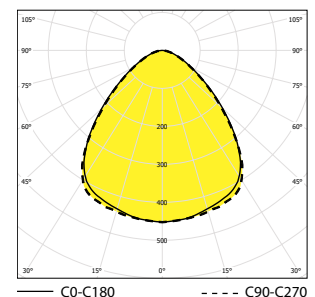


Accessories on request



Suspended mounting





003576 Suspension bracket M5x10 zn



Direct mounting

051216 Set for direct fastening RIDGE43
(cable entry from the lighting fixture front side must be specified in the order)

Lighting fixture detail

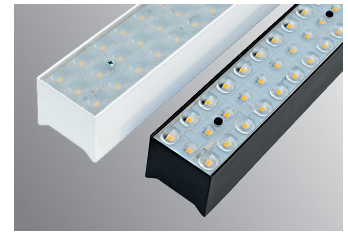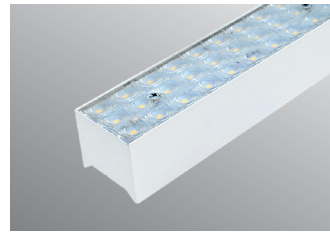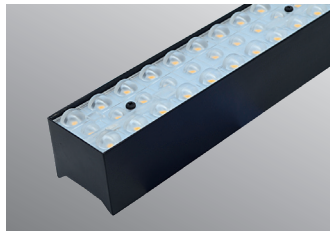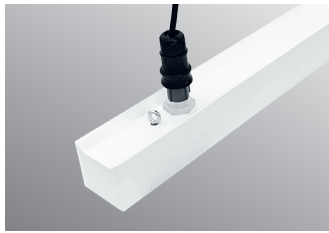

On request

DIM – dimmable electronic ballast (DALI, DSI, 1-10V)

GESIS – possibility to equip lighting fixtures with connectors

MULTI-1/3 - maintained emergency lighting

2.7K-6.5K - colour temperature

RAL - other colour scale

1/3 F - single-phase or three phase through wiring connection, maximum diameter of wires 2.5 mm²

Standard order number	MULTI-1H	MULTI-3H	DALI	1F	3F
050176	X	X	050176	X	X
050177	X	X	050177	050177 1F	050177 3F
050178	050178 1H	050178 3H	050178	050178 1F	050178 3F
050179	050179 1H	050179 3H	050179	050179 1F	050179 3F
050180	X	X	050180	X	X
050181	X	X	050181	050181 1F	050181 3F
050182	050182 1H	050182 3H	050182	050182 1F	050182 3F
050183	050183 1H	050183 3H	050183	050183 1F	050183 3F
050184	X	X	050184	X	X
050185	X	X	050185	050185 1F	050185 3F
050186	050186 1H	050186 3H	050186	050186 1F	050186 3F
050187	050187 1H	050187 3H	050187	050187 1F	050187 3F